

THERMAL FUSIBLE LINK



| OVERVIEW |

The Flamefast range of Fusible Thermal Links are to be installed directly above boiler plant and are designed to detect excessive heat, and when interfaced with a Flamefast BoilerGuard (or third party safety circuit) can be used to isolate the fuel supply to the plant. All fuses have an activation point of 72°C with resettable and non-resettable types available.

Technical Specification

Contact Rating	SPST - 5A @ 250V Max
Activation Point	72°C (162°F)
Mounting Height	0.3 to 1.0m above plant


Mounting Type:

Resettable Standard	Circular Conduit Box
Non-resettable	M20 conduit entry

Part Numbers & Options/Accessories

Part No	Description
TFUSE	Resettable Fusible Thermal Link (72°C)
TFL72	Non-resettable Fusible Thermal Link (72°C)

RESETTABLE

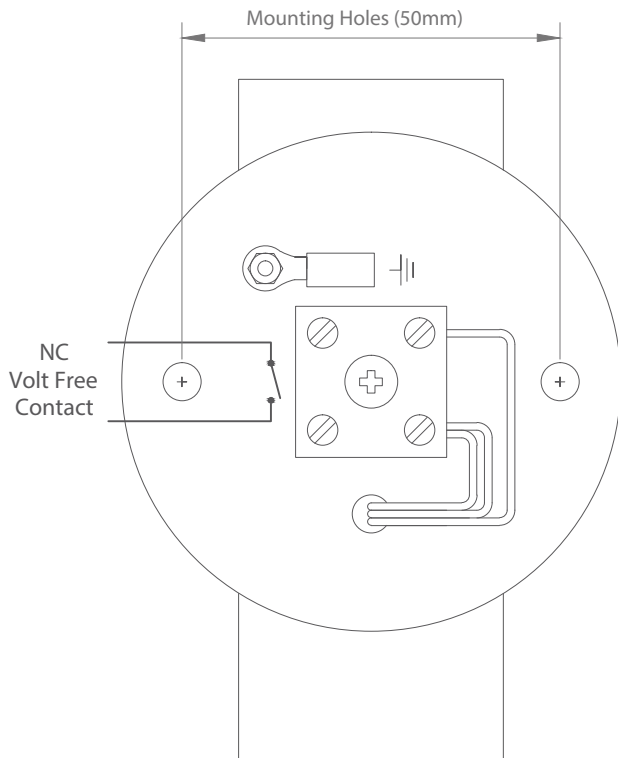

NON-RESETTABLE

