


CABLE - TWO TWISTED PAIR

22AWG, SHIELDED & SCREENED

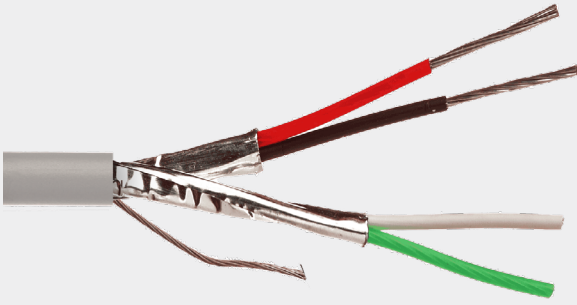

| OVERVIEW |

The Belden 8723 equivalent controls and instrument cable is ideal for the installation of the Flamefast range of peripheral devices and sensors. The individually shielded pairs and screen drain wire are ideal for reducing interference from external sources, especially on comms based networks.

TECHNICAL SPECIFICATION

Cable Length	100m
Conductor Size	22 AWG (0.325mm ²)
Conductor Construction	Stranded, 7x30 AWG
Conductor Material	Tinned Copper
Voltage Rating	300V
Insulation Material	Polypropylene

PART NUMBERS & COMMON ACCESSORIES

PART NO	DESCRIPTION
CABLE1	Belden 8723 Equivalent (100m)