


GAS SOLENOID VALVE

EN161, NC, AUTO-RESET (230V AC)

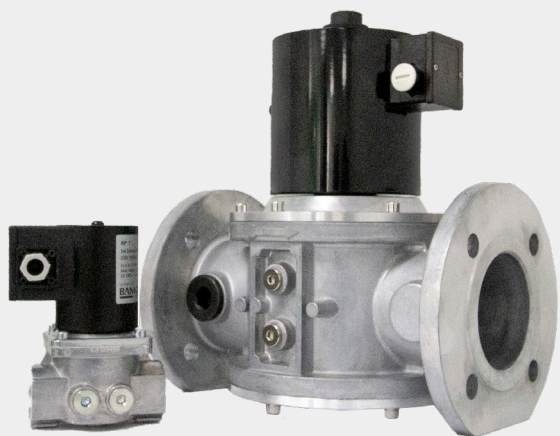

| OVERVIEW |

This Class "A" direct acting, normally closed Gas Solenoid Valve can be used in conjunction with any GasGuard panel for low pressure isolation, proving and interlocking systems. The twin port design (excluding ½") allows easy installation of the Flamefast Pressure Transmitter or CPI switches.

Exact specification and manufacturer may vary.

TECHNICAL SPECIFICATION

Power Supply	230VAC 50Hz
Body Material	Aluminium
Internal Material	Aluminium
Seal Material	NBR
Media Temp	-10°C ~ 90°C
IP Rating	IP54
Approval	CE, UKCA, EN161

PART NUMBERS & COMMON ACCESSORIES

PART NO	DESCRIPTION
SV15	½" Gas Solenoid Valve (230V)
SV20	¾" Gas Solenoid Valve (230V)
SV25	1" Gas Solenoid Valve (230V)
SV32	1¼" Gas Solenoid Valve (230V)
SV40	1½" Gas Solenoid Valve (230V)
SV50	2" Gas Solenoid Valve (230V)
SV65	2½" Gas Solenoid Valve (230V)
SV80	3" Gas Solenoid Valve (230V)
SV100	4" Gas Solenoid Valve (230V)
SV150	6" Gas Solenoid Valve (230V)
SV200	8" Gas Solenoid Valve (230V)

LARGER SIZES & MANUFACTURERS AVAILABLE ON REQUEST

PART NUMBER	SIZE (inch)	SIZE (mm)	CONN	MAX OP PRESS (mB)	NOM POWER (W)	OVERALL DIMENSIONS			
						Height	Face-Face	Depth	Weight
						(mm)	(mm)	(mm)	(Kg)
SV15	½	15	BSP	360	15	112	72	52	1.1
SV20	¾	20	BSP	360	22	156	85	70	2.2
SV25	1	25	BSP	360	22	156	100	70	2.2
SV32	1¼	32	BSP	360	42	214	150	110	5.0
SV40	1½	40	BSP	360	42	214	150	110	5.0
SV50	2	50	BSP	360	50	220	170	135	6.2
SV65	2½	65	PN16	360	72	343	310	200	15.0
SV80	3	80	PN16	360	72	343	310	200	15.3
SV100	4	100	PN16	360	175	384	350	250	36.4
SV125	5	125	PN16	200	290	600	460	300	60.0
SV150	6	150	PN16	200	290	600	460	300	60.0
SV200	8	200	PN16	200	290	730	600	340	160.0